



RAINOR® 拉繩位移傳感器系列




S型機座號：最大有限行程2000mm；
S type series: Max. electrical stroke 2000mm

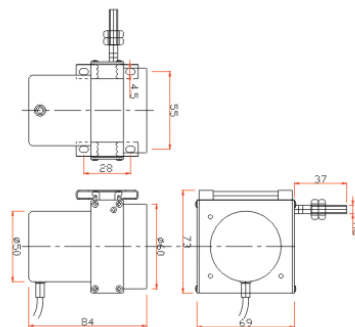

M型機座號：最大有限行程(電流、電壓、電阻型)7000mm，
(脈衝型)8000mm；
M type series: Max. electrical stroke(current,voltage,resistance model)
7000mm, (pulse model)8000mm

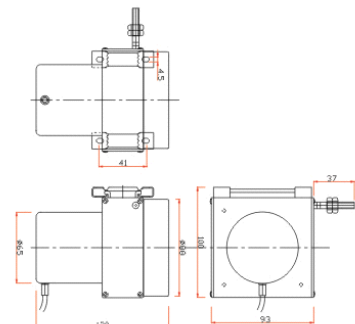

L型機座號：最大有限行程(電流、電壓、電阻型)16000mm，
(脈衝型)20000mm；
L type series: Max. electrical stroke(current,voltage,resistance model)
16000mm, (pulse model)20000mm

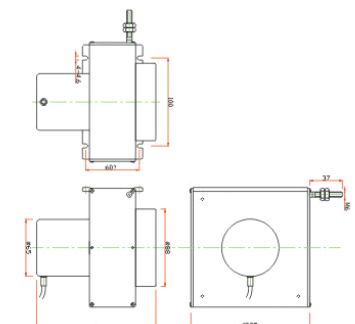

Main parameters

Type	Universal	Precision	R, V1/V2
Linearity	±0.15%FS	±0.08%FS	±0.15%-0.08%
Repeatable accuracy	0.01%FS-0.005%FS		
Product models	Output style		
Current	4-20mA or 20-4mA		
Voltage	0-5/0-10VDC or 5-0/10-0VDC		
Resistance	0-5KΩ or 0-10KΩ		
Pulse	3600-5000ppr, incremental		
set screws	M4mm		
Installation	holder		
Active life	5×10 ⁶ cycles movements		
Protection class	IP65		