

MINUO 米诺 KTL 微型滑塊系列





可用外置模塊,
 量程: 0-125mm;
 可選模擬輸出: 0~5V, 0~10V,
 4-20mA 標準信號; 標準100mm
 屏蔽線引出, 適應狹小的安裝位置,
 如紡織機械、印染設備等。

External connected signal processing,
 Stroke range: 0-125mm.
 Analog output: 0-5V, 0-10V, 4-20mA
 with 100mm shield wire;
 Suitable for narrow space situation,
 such as textile machine, printing
 and dyeing equipment etc.

KTL Series		10	15	25	50	75	100	125	\	\	\	\	\	\	\	\
Total Electrical Travel(T.E)電性總行程	mm	11	16	25	51	76	101	126	\	\	\	\	\	\	\	\
Active Electrical Travel(A.E)可用電性行程	mm	10	15	25	50	75	100	125	\	\	\	\	\	\	\	\
Resistance 電阻 ±20%	kΩ	1.0		5.0				\	\	\	\	\	\	\	\	\
Independent Linearity 獨立線性率	±%	0.05														
Mechanical Travel 機械行程(M.T)	mm	11	16	26	51	75	101	126	\	\	\	\	\	\	\	\
Output range 輸出範圍		分压器 Voltage divider														
Resolution 解像度		infinite 無限														
Temperature Range 使用溫度範圍	°C	-50~120														
Dimensions 尺寸A	mm	47	52	62	87	112	137	162	\	\	\	\	\	\	\	\

尺寸僅供參考, 如有更改, 恕不另行通知
 Dimensions for reference only, subject to change without notice

Mechanical Dimension KTL 尺寸 KTL 微型滑塊式

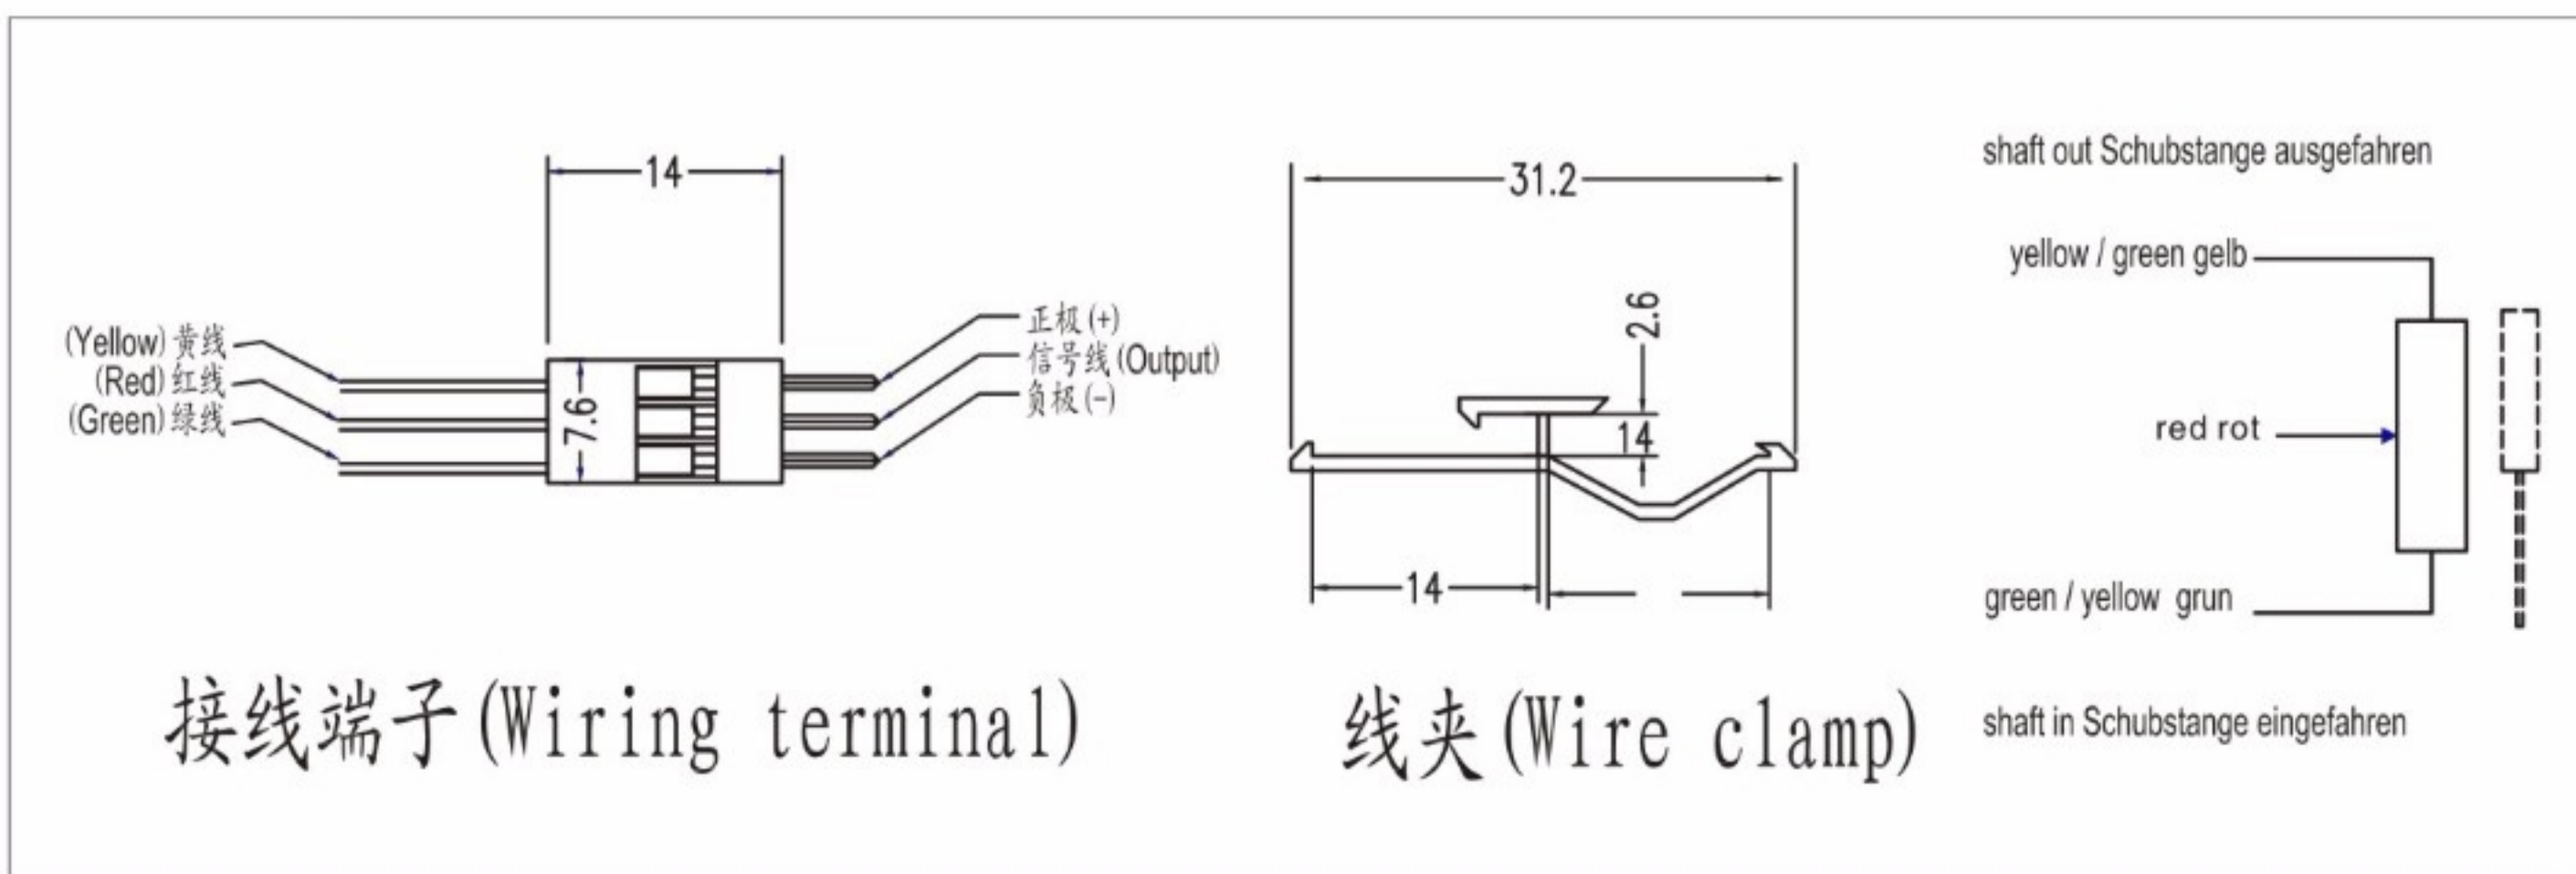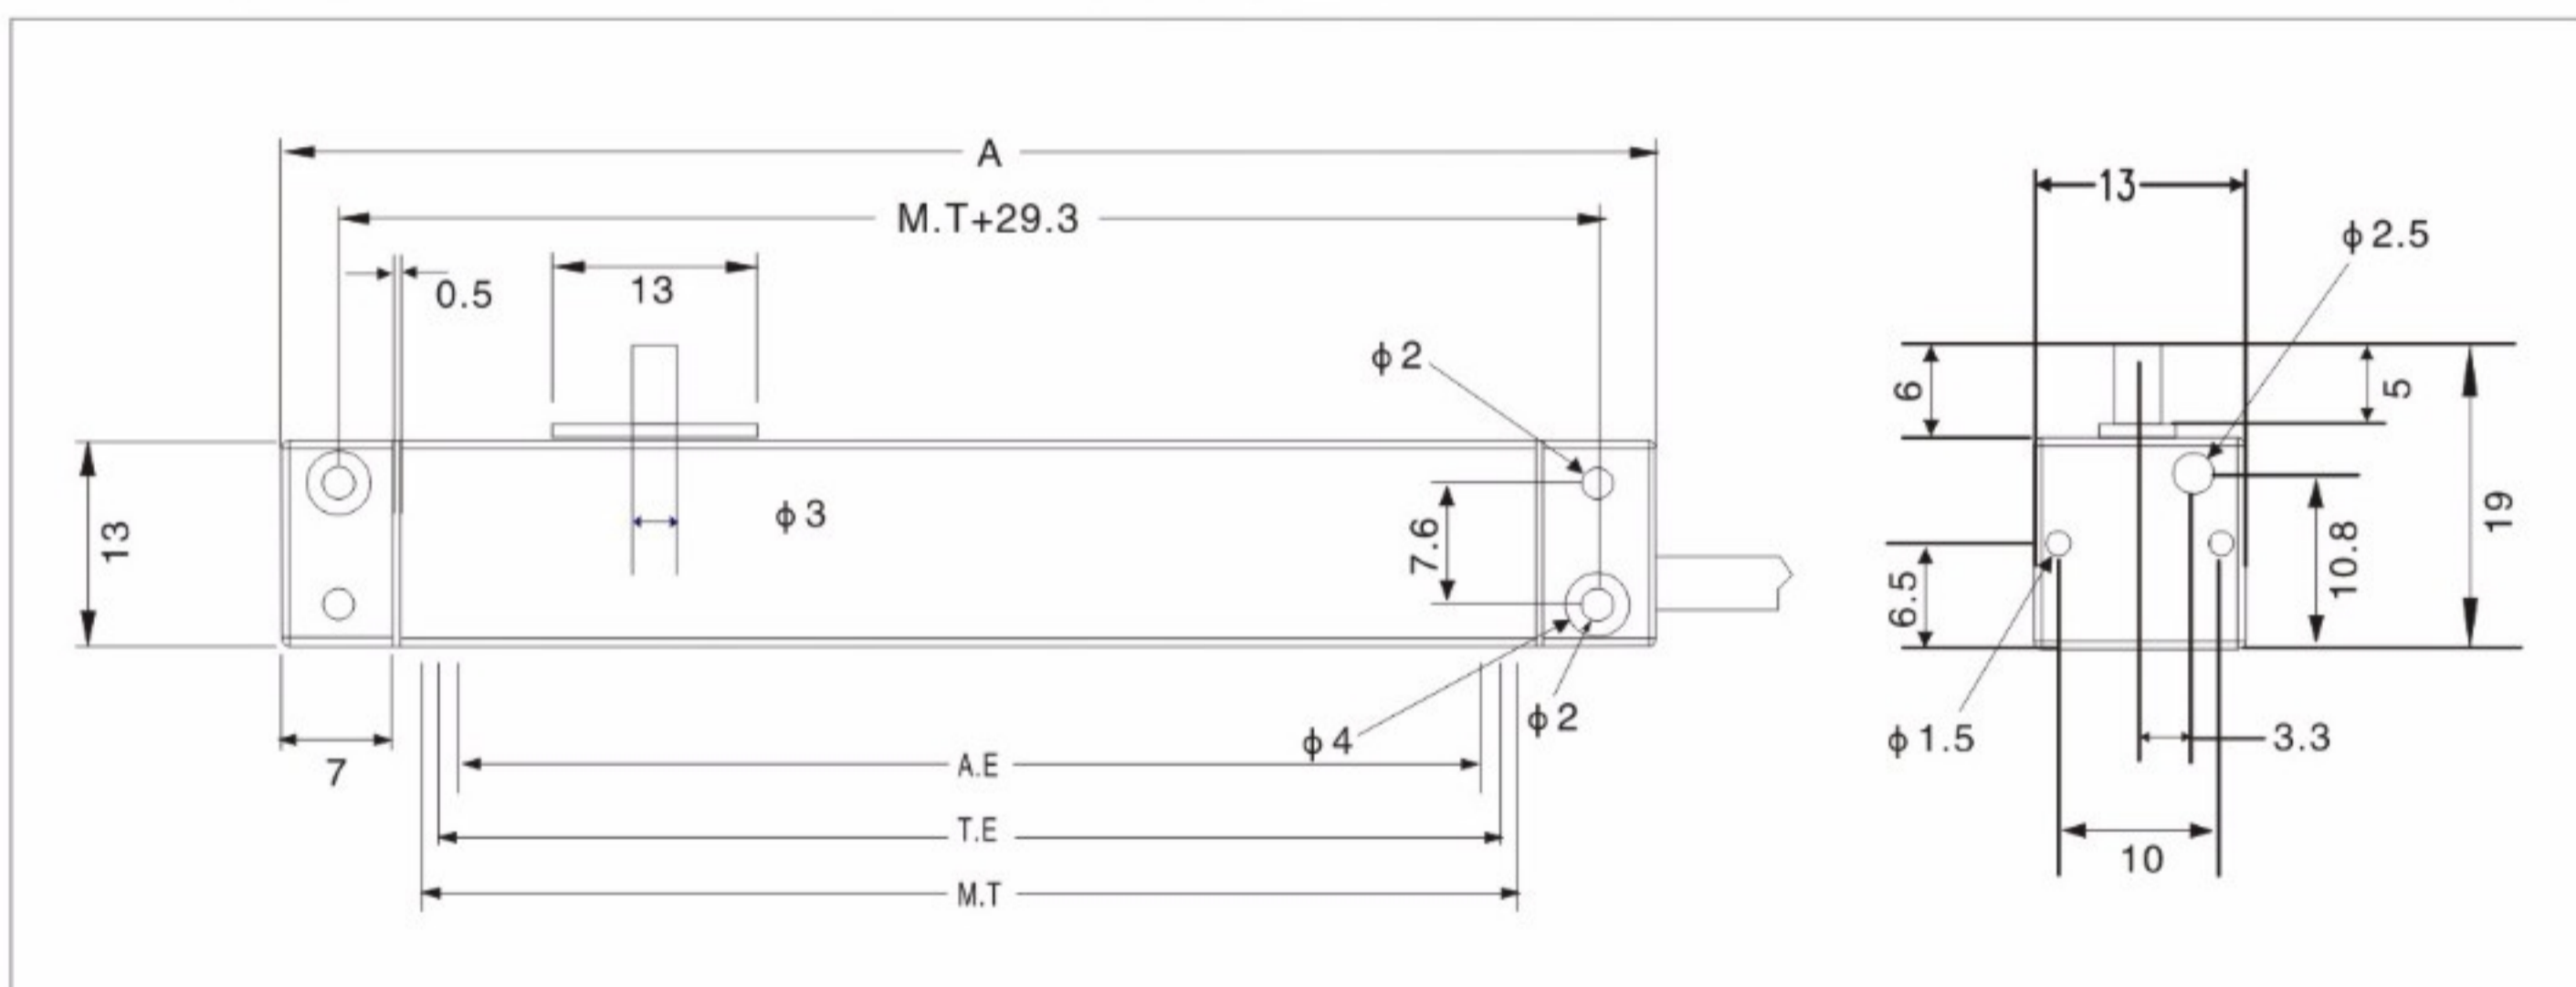

接线端子 (Wiring terminal)

线夹 (Wire clamp)