

MINUO® 米諾 KDC-33 鉸鏈系列



內置模塊，關節軸承，量程：
0~1250mm，可選模擬輸出：0~5V，
0~10V，4~20mA，兩端帶鉸鏈接
安裝方式，適用於較大機械行程且
有擺動的位置檢測，對安裝的對中
性無任何要求。例如：機器人，磚
機，陶瓷機械，水閘控制等。

Built-in signal processing, joint bearings
stroke range: 0~1250mm, analog output:
0~5V, 0~10V, 4~20mA. Both ends With
ball coupling installation. Apply to large
mechanical travel and swing position
detection, without any requirement on
the installation of the neutral. Such as
robot, brick machine, ceramic machine,
sluice controlling etc


KDC-33 Series 鉸鏈系列		75	100	125	150	175	200	225	250	275	300	325	350	375	400	425
Total Electrical Travel(T.E)電性總行程	mm	80	105	130	155	180	205	230	255	280	305	330	355	380	405	430
Active Electrical Travel(A.E)可用電性行程	mm	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425
Resistance 電阻 ±20%	kΩ	5.0														
Independent Linearity 獨立綫性率	± %	0.05														
Mechanical Travel 機械行程(M.T)	mm	83	108	133	158	183	208	233	258	283	308	333	358	383	408	433
Output range輸出範圍		分压器 Voltage divider														
Resolution解像度		infinite 無限														
Temperature Range 使用温度範圍	℃	-50+120														
Dimensions 尺寸A	mm	152	177	202	227	252	277	302	327	352	377	402	427	452	477	502

KDC-33 Series 拉杆系列		450	475	500	550	600	650	700	750	800	850	900	950	1000	1150	1250
Total Electrical Travel(T.E)電性總行程	mm	455	480	505	555	605	655	705	755	805	855	905	955	1005	1155	1255
Active Electrical Travel(A.E)可用電性行程	mm	450	475	500	550	600	650	700	750	800	850	900	950	1000	1150	1250
Resistance 電阻 ±20%	kΩ	5.0					10									
Independent Linearity 獨立綫性率	± %	0.05														
Mechanical Travel 機械行程(M.T)	mm	458	483	508	558	608	658	708	758	808	858	908	958	1008	1158	1258
Output range輸出範圍		分压器 Voltage divider														
Resolution解像度		infinite 無限														
Temperature Range 使用温度範圍	℃	-50+120														
Dimensions 尺寸A	mm	527	552	577	627	677	727	777	827	877	927	977	1027	1077	1227	1327

尺寸僅供參考，如有更改，恕不另行通知

Dimensions for reference only, subject to change without notice

Mechanical Dimension KDC-33 尺寸 KDC-33 鉸鏈式

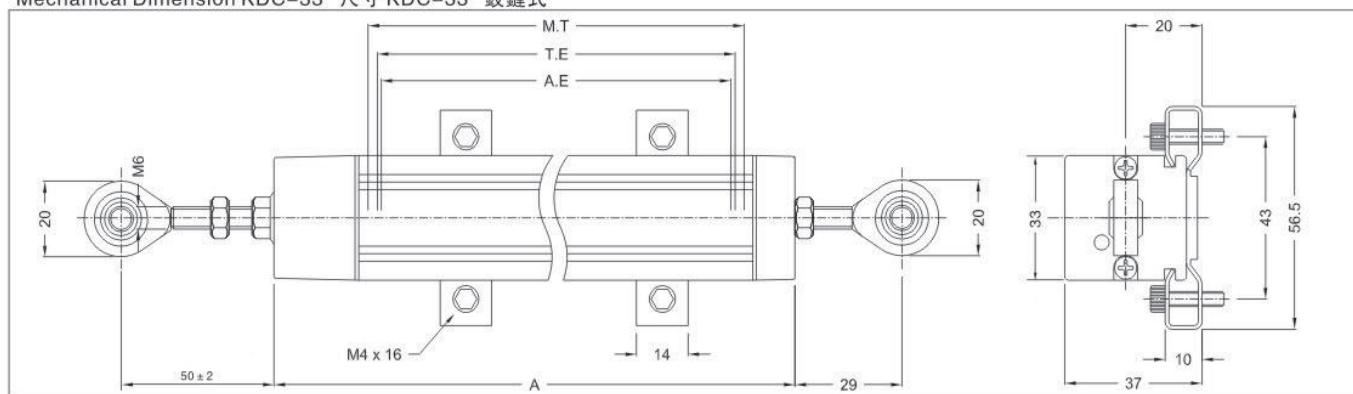

Ball Coupling 球鉸

