

MINUO 米诺 KPY3系列




可裝外接變送器：DIN連接頭，萬向節，量程0-200mm，可選模塊輸出：0-5V，0-10V，4-20mA，標準信號。採用軸向牽引結構，案例：注塑機，塑膠設備，壓鑄設備，制鞋機，吹瓶機，液壓氣動設備等。

Can pack built-out transmitter: DIN connectors, universal joint, the range of 0-200 - mm, optional modules output: 0 to 5 v, 0 to 10 v, 4-20 mA, standard signal. The axial drawing structure, case: injection molding machine, plastic equipment, die casting equipment, shoes machine, bottle blowing machine, hydraulic pneumatic equipment.


技术资料 Technical data

使用行程 The stroke(mm)	0----200
解析度 Resolution	无限 Infinite
电阻公差 Resistance tolerance	±20%
建议电流 Recommendations	<1mA
最大电流 The maximum current	≤10mA
每℃漂移度 Each temperature drift	<1.5ppm/℃
绝缘阻抗 Insulation resistance	>100MΩhm at 500v
工作温度 Working temperature	-30...+100℃
储存温度 Storage temperature	-50...+120℃
最大移动速度 Maximum moving speed	≤5m/s
移动力 Mobile force	≤1.2N


电气接线图 Electrical wiring diagram

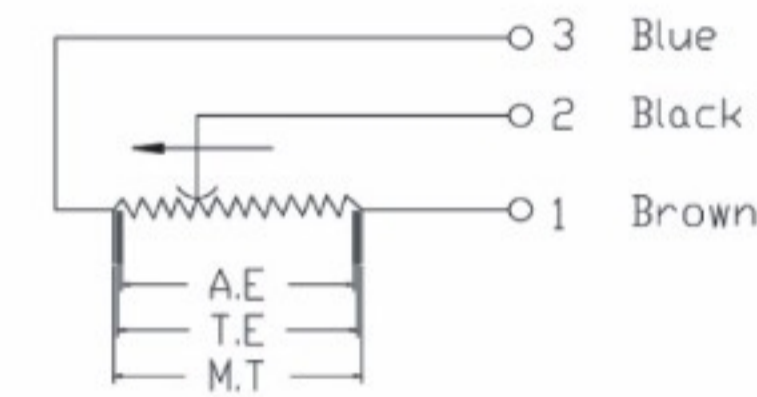

KPY3C

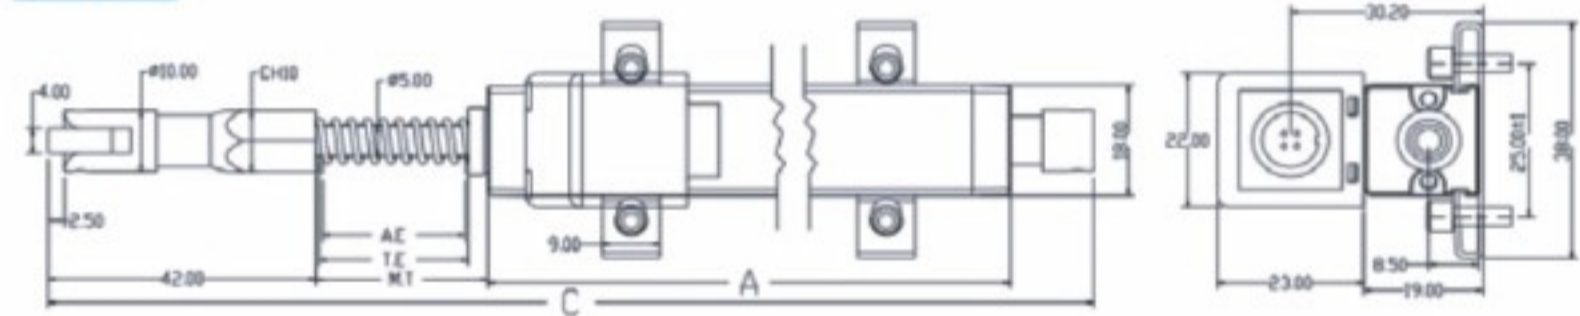

KPY3F

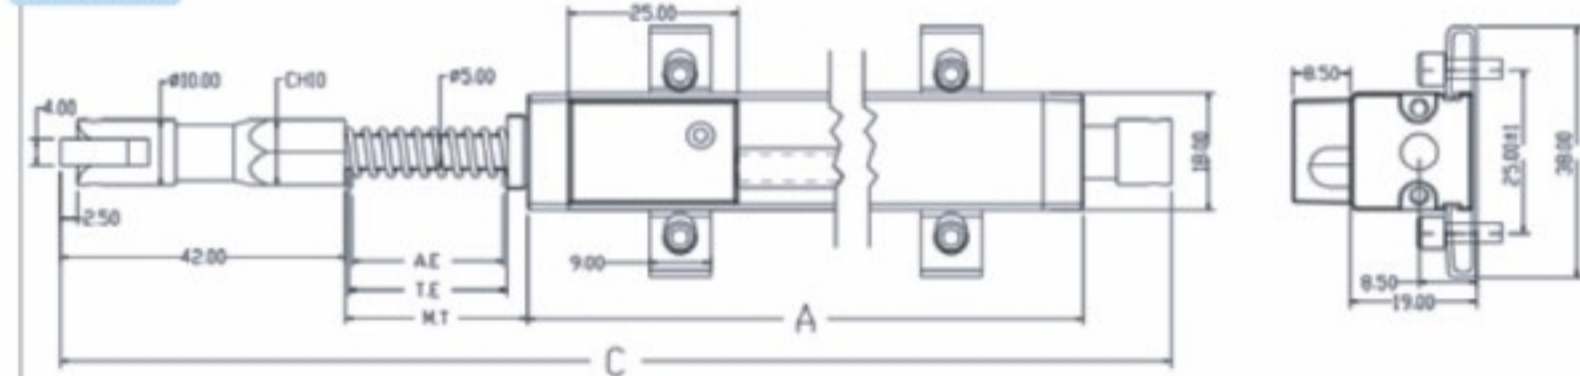

电气特性 Electrical characteristics:

型号 Model		10	25	50	75	100
使用行程AE The use of travel AE	mm	10	25	50	75	100
理论行程TE The theory of travel TE	mm	AE+1				
阻抗TE Impedance TE	KΩ	1	1	5	5	5
线性精度 Linear precision	±%	0.3	0.2	0.1	0.1	0.1
最大耐压 The maximum pressure	V	14	25	60		
机械行程MT Mechanical travel MT	mm	AE+5				
外壳总长A The shell length of A	mm	AE+46				
总长C The length of C	mm	129	159	209	259	309